


We had seen in previous article framing, that to send packets from sender to the receiver framing is required. But the question was how the receiver will identify the starting and ending of a frame. For receiver, starting and ending of a frame is necessary to recognize the next frames transmitted by the sender.

So in this case Byte count framing method will support.

The byte count framing method uses a field in the header to specify the number of bytes in the frame.

1. Data link layer at sender sends the byte count.
2. Data link layer at receiver counts the byte count sent by sender.
3. If there is difference between bytes counts of sender and receiver. There is error in data received.
4. Else received data is correct.
5. Above points are shown in diagram below.

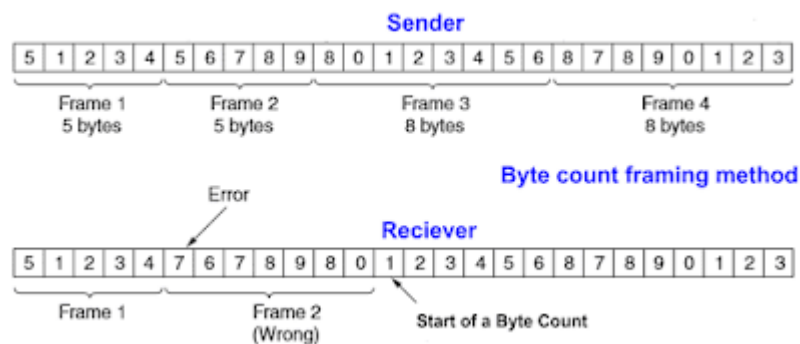

Related Posts:

1. What is computer network
2. Data Link Layer
3. Framing
4. Flag bytes with byte stuffing framing method
5. Flag bits with bit stuffing framing method
6. Physical layer coding violations framing method
7. Error Control in Data link layer
8. Stop and Wait
9. Sliding Window Protocol
10. One bit sliding window protocol
11. A Protocol Using Go-Back-N
12. Selective repeat protocol
13. Net 10
14. Net 9
15. Net 47
16. Net 43
17. OSI vs TCP/IP
18. TCP/IP Reference Model
19. OSI Reference Model
20. Computer Networks Introduction
21. Types of Computer Networks
22. Network Architectures
23. Computer Network Topologies
24. LAN and WAN Protocols
25. Network Address
26. IP Addresses

- 27. Class Full Addressing
- 28. Networking Media
- 29. Networking Devices
- 30. Structured cabling
- 31. Types of connectivities in Computer Networks
- 32. Introduction to Network Operating System(NOS)
- 33. ARP/RARP
- 34. Cooperative Caching