



1. Open a new tab in Chrome, type `chrome://flags` into the address bar, and press Enter.



2. In the "Search flags" box at the top, type Glic.

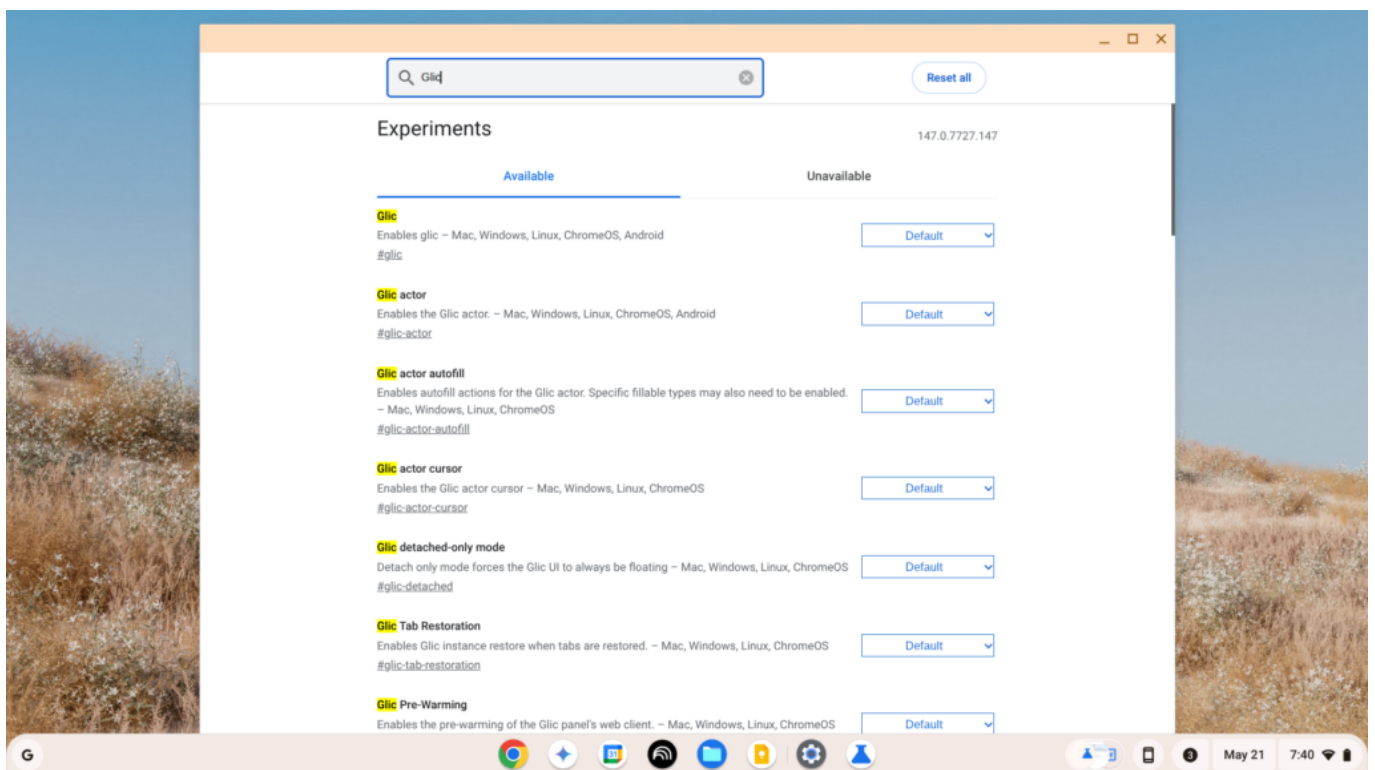

3. You will see a few options appear (like `#glic` and `#glic-side-panel`). Change the dropdown menu next to all of them from *Default* to Enabled.

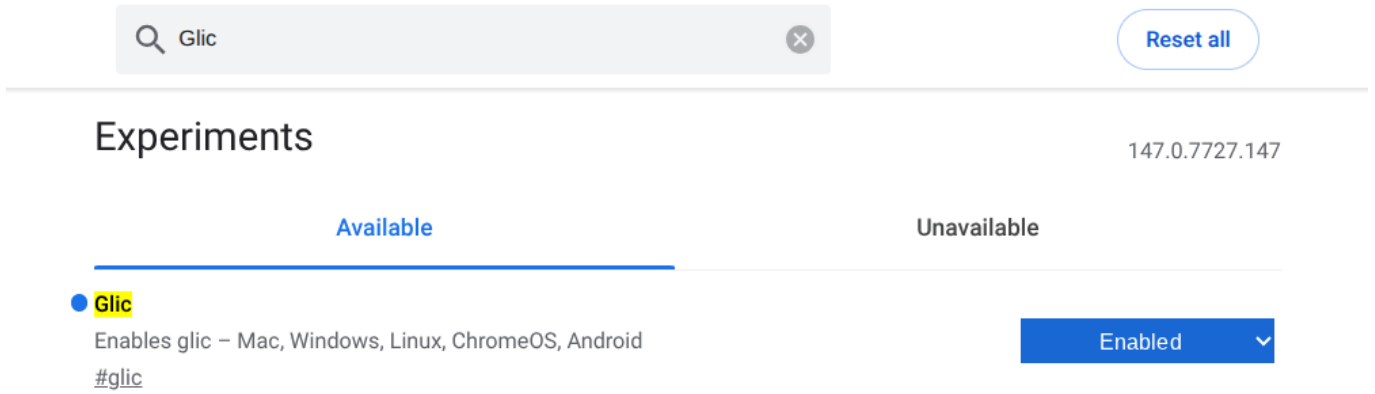

4. Click the blue Relaunch button that appears at the bottom right of your screen to restart Chrome.

Search: Glic Reset all

Experiments 147.0.7727.147

Available	Unavailable
Glic Enables glic – Mac, Windows, Linux, ChromeOS, Android #glic	Enabled
Glic actor Enables the Glic actor. – Mac, Windows, Linux, ChromeOS, Android #glic-actor	Default
Glic actor autofill Enables autofill actions for the Glic actor. Specific fillable types may also need to be enabled. – Mac, Windows, Linux, ChromeOS #glic-actor-autofill	Default
Glic actor cursor Enables the Glic actor cursor – Mac, Windows, Linux, ChromeOS #glic-actor-cursor	Default
Glic detached-only mode Detach only mode forces the Glic UI to always be floating – Mac, Windows, Linux, ChromeOS #glic-detached	Default
Glic Tab Restoration Enables Glic instance restore when tabs are restored. – Mac, Windows, Linux, ChromeOS	Default

Your changes will take effect the next time you restart your device. Restart