


1. Open a new tab in Chrome, type `chrome://flags` into the address bar, and press Enter.

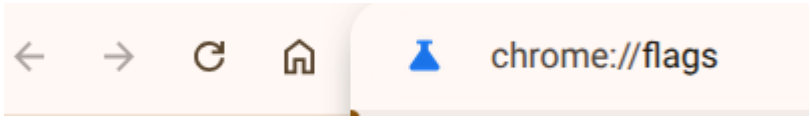


2. In the “Search flags” box at the top, type `Glic`.

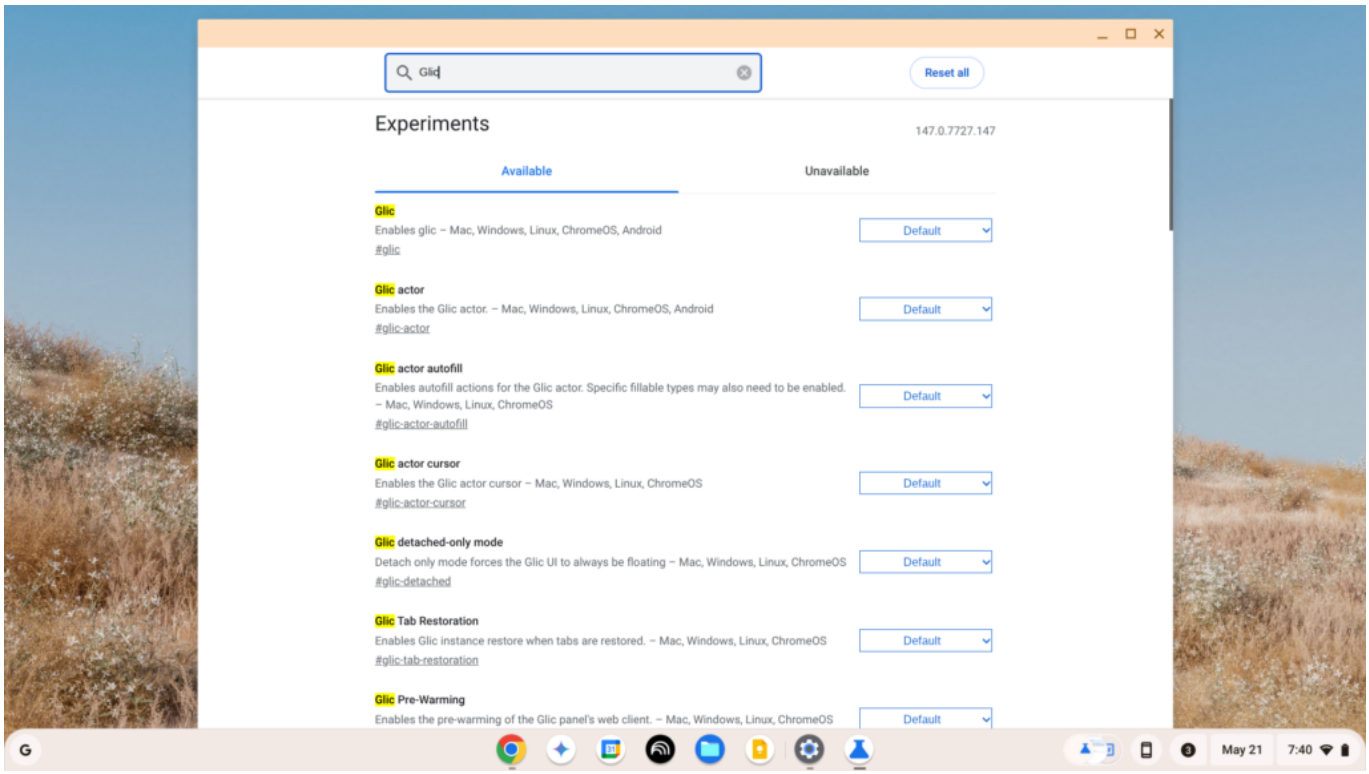

3. You will see a few options appear (like `#glic` and `#glic-side-panel`). Change the dropdown menu next to all of them from *Default* to Enabled.

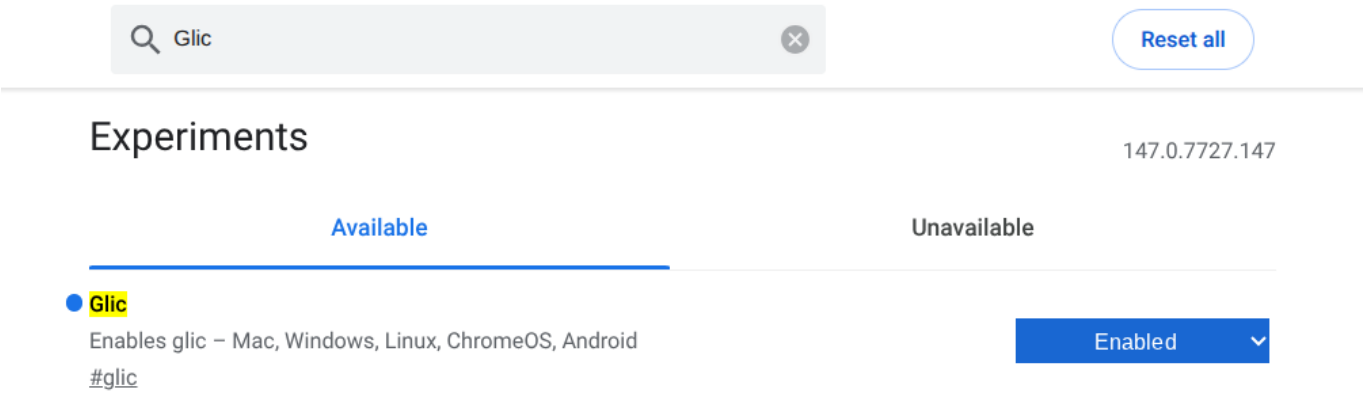

4. Click the blue Relaunch button that appears at the bottom right of your screen to restart Chrome.

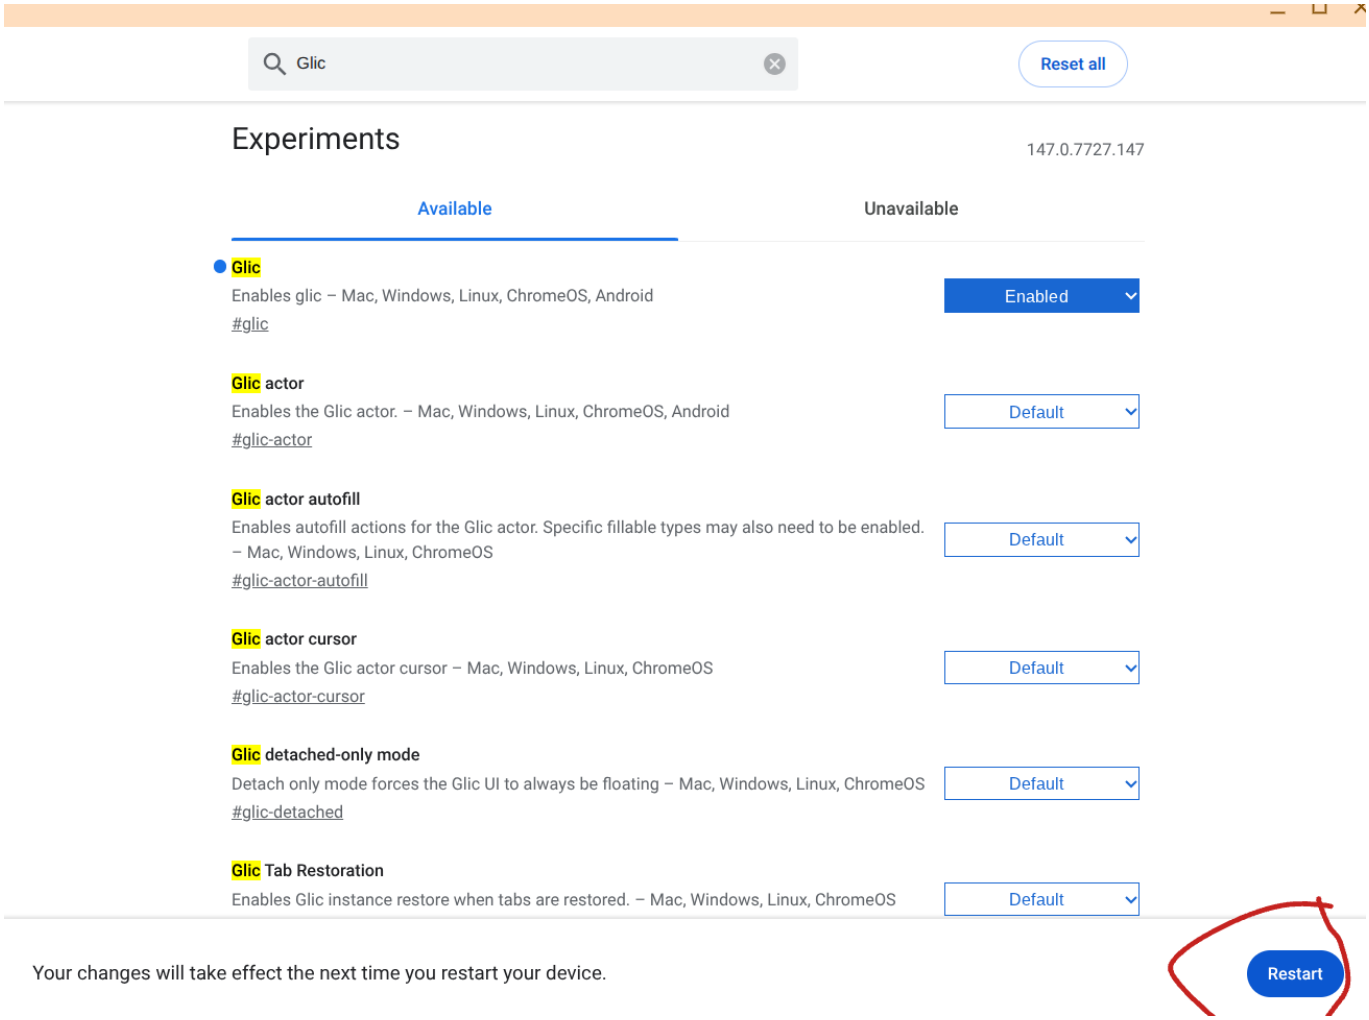
Glic
Reset all
Experiments
147.0.7727.147
Available
Unavailable
Glic
Enables glic – Mac, Windows, Linux, ChromeOS, Android
#glic
Enabled
Glic actor
Enables the Glic actor. – Mac, Windows, Linux, ChromeOS, Android
#glic-actor
Default
Glic actor autofill
Enables autofill actions for the Glic actor. Specific fillable types may also need to be enabled. – Mac, Windows, Linux, ChromeOS
#glic-actor-autofill
Default
Glic actor cursor
Enables the Glic actor cursor – Mac, Windows, Linux, ChromeOS
#glic-actor-cursor
Default
Glic detached-only mode
Detach only mode forces the Glic UI to always be floating – Mac, Windows, Linux, ChromeOS
#glic-detached
Default
Glic Tab Restoration
Enables Glic instance restore when tabs are restored. – Mac, Windows, Linux, ChromeOS
Default
Your changes will take effect the next time you restart your device.
Restart